


RFID-Tag in einer Kreditkarte

RF-ID (near-field)

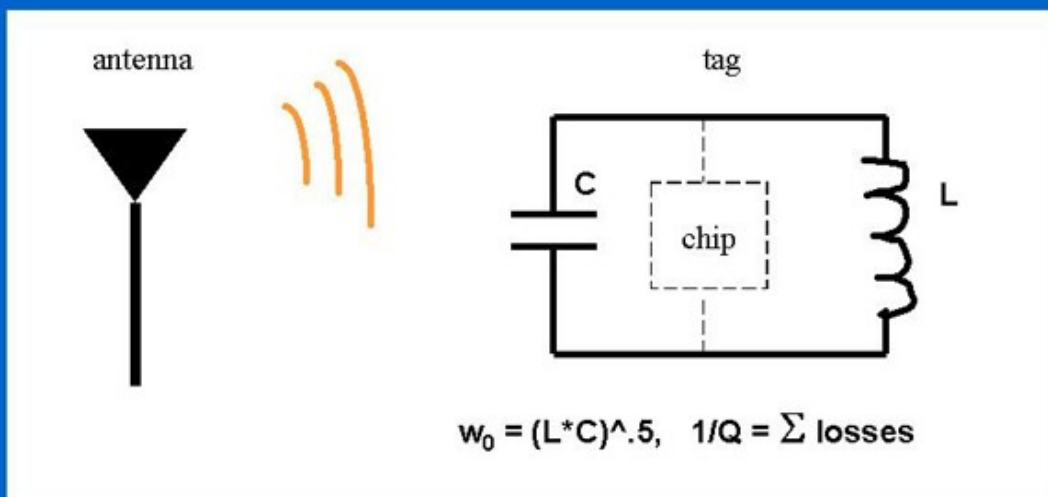

Information is encoded in w_0 , Q , or modulation (AM, FM, PM)